




Asian Electron Co., Ltd.

6F-1, No.150, Jian Yi Road, Zhonghe Dist., New Taipei City 235, TAIWAN, R.O.C.

TEL.: 886-2-8226-5158, FAX: 886-2-82265150

[Http://www.asian-electron.com](http://www.asian-electron.com)

Email: sales@asian-electron.com

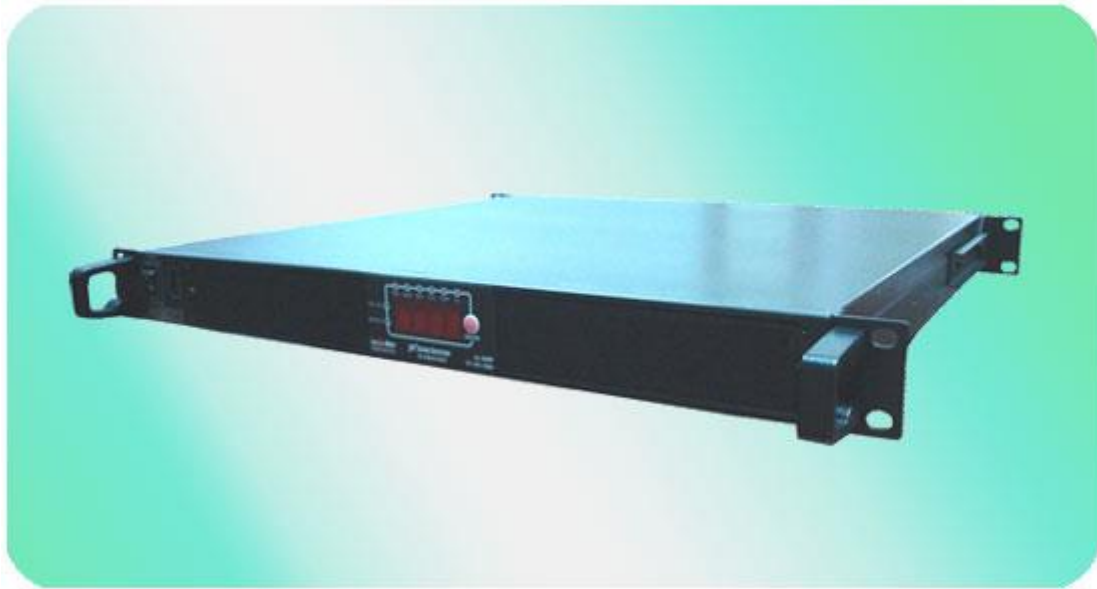

1U 19"/23" Rack-mount Model 1U 19"/23" Open Frame Cabinet model YK-PSW2KVA Series Pure Sine Wave Inverter

Features

- R Load Pure sine wave output (THD < 3%)
- Digital display
- Bypass function (STS)
- Output frequency: 50 / 60Hz switch
- RS-232 interface / Wire connection to PC
- Wired Remote control (optional)
- Loading & Temperature controlled cooling fan
- Advanced microprocessor
- Protection :
 - Input Undervoltage
 - Input Overvoltage
 - Overload
 - Short circuit
 - Low battery alarm
 - Over temperature

Electrical Performance : 2KVA

Specification	Model					
Item	YK-PSW122KVA (1U)	YK-PSW242KVA (1U)	YK-PSW482KVA (1U)	YK-PSW122KVAE (1U)	YK-PSW242KVAE (1U)	YK-PSW482KVAE (1U)
Continuous Output Power	1600W	1700W	1700W	1600W	1700W	1700W
Surge Rating	1870W/1Min			1870W/1Min		
	2040W/20Sec			2040W/20Sec		
Input Voltage	12V	24V	48V	12V	24V	48V
Frequency	50/60Hz ± 0.05% (Switch Selectable)					
Peak Output Current	25A			11A		
Efficiency (full load)	86%	88%	90%	87%	90%	92%
No Load Current Draw	1.45A	0.7A	0.45A	1.47A	0.8A	0.47A
Output Waveform	R Load Pure Sine Wave <3% THD					
Output Voltage Regulation	100/110/115/120V(Switch Selectable) RMS±3%			200/220/230/240V(Switch Selectable) RMS±3%		
P.F.	0.8	0.85	0.85	0.8	0.85	0.85
Input Voltage Range	10-16VDC	20-32VDC	42-62VDC	10-16VDC	20-32VDC	42-62VDC
Protection	Overload, Short Circuit, Reverse Polarity (fuse), Input Undervoltage, Input Overvoltage, Over Temperature					
Digital Display	OVP, UVP, OTP, OLP, VAC, AMP, WATT, VDC, TEMP, Hz					
Safety	UL60950-1 (File No. E324561)			EN60950-1		
EMC	FCC Class B			EN 55022: 2010/AC: 2011(Class B) EN 55024:2010 EN 61000-3-2:2006+A1:2009+A2:2009 EN 61000-3-3:2013 IEC 61000-4-2:2008 IEC 61000-4-3:2006+A1:2007+A2:2010 IEC 61000-4-4:2012 IEC 61000-4-5:2005 IEC 61000-4-6:2008 IEC 61000-4-8:2009 IEC61000-4-11:2004		
Interface Control Port	RS-232 With Baud Rate 2400,4800, 9600, 19200 (Switch Selectable)					
AC Input	110V AC (90V – 130V)			220V AC (180V – 260V)		
AC Frequency	(50Hz ~ 60 Hz) ± 3%					
Bypass	4~6ms					
Operating Temperature Range	-20°C to 60°C					
Storage Temperature Range	-30°C to 70°C					
Cooling	Loading & Temperature controlled cooling fan					
Dimensions	416.8(L) x424.0(W) x44.0(H) mm					
Weight	9 kgs					
The wire gauge for AC input and AC output	#12					
	WARNING: The proper connection needs to be made in reference to line/neutral.					