


6F-1, No.150, Jian Yi Road, Zhonghe Dist., New Taipei City 235, TAIWAN, R.O.C.

TEL: 886-2-8226-5158 FAX:886-2-82265150

<http://www.asian-electron.com>

e-mail: sales@asian-electron.com

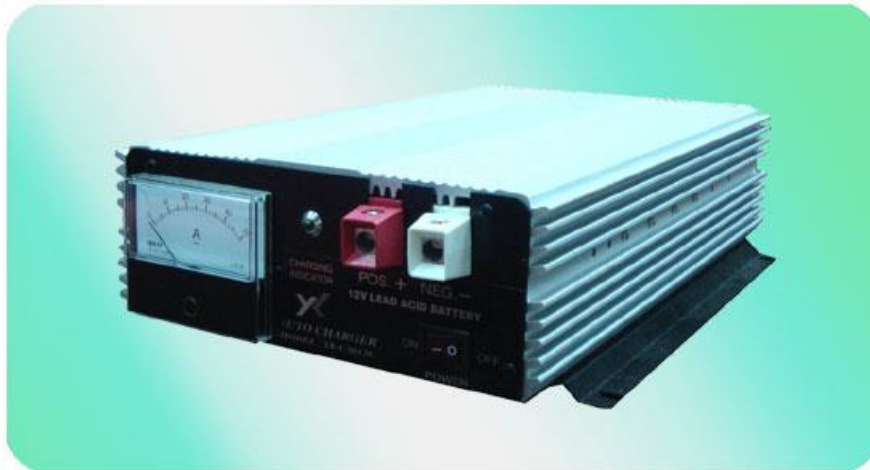

24V/25A Series Battery Charger

Specification: Battery Charger 24V-25A

Type	YK-C2524	YK-C2524E
Spec.	24V/25A	24V/25A
Input supply voltage	110V ± 10%	220V ± 10%
Charging end voltage (V1)	28.8V	
Maintenance charger (V2)	27.6V	
Max. charging current	25A	
Operating temperature range	0°C ~ 50°C	
Frequency	50 / 60 Hz	
Net Weight	7.6 kgs	
Dimension (L x W x H) mm	370 x 240 x 90	

The specifications are subject to change without notice.